


SCREEN 2165

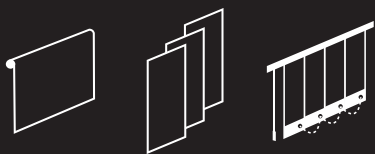

Disponibile | Available | Disponible
250 mm

SCREEN 2165

SCREEN 2165


CARACTERÍSTICAS TÉCNICAS

TECHNICAL CHARACTERISTICS | CARACTÉRISTIQUES TECHNIQUES

Composición Composition Composition	42% Fibra de vidrio Fiberglass Fibre de verre
	58% PVC
Ancho de rollo Roll width Largeur du rouleau	250 cm
Peso por m² Weight per m ² Poids par m ²	535 gr
Grosor de tejido Fabric thickness Épaisseur de la toile	0,83 mm
Clasificación resistencia al fuego Fire classification Résistance au feu	Ignífugo Clase 1 Fireproof Class 1 Ignifugé Classe 1
Factor de apertura Openness factor Facteur d'ouverture	4% Aproximadamente Approximately Approximativement
Uso recomendado Recommended use Usage recommandé	Exterior e interior Exterior and interior Extérieur et intérieur
Mantenimiento Maintenance Maintenance	Paño húmedo y jabón neutro por ambas caras Damp cloth and mild soap on both sides Chiffon humide et un savon doux sur les deux côtés

Aplicaciones

Applications | Applications



Disponible | Available | Disponible
250 mm

saxun®