


---

# SCREEN 3600-1

---

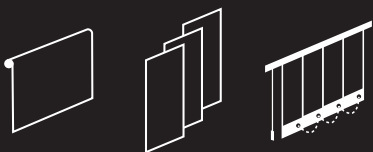

Disponibile | Available | Disponible  
89, 127, 250 mm

SCREEN 3600

# SCREEN 3600-1

## CARACTERÍSTICAS TÉCNICAS

TECHNICAL CHARACTERISTICS | CARACTÉRISTIQUES TECHNIQUES

<b>Composición</b> Composition   Composition	30% Poliéster Polyester   Polyester
	70% PVC
<b>Ancho de rollo</b> Roll width   Largeur du rouleau	250-300 cm
<b>Peso por m<sup>2</sup></b> Weight per m <sup>2</sup>   Poids par m <sup>2</sup>	480 gr
<b>Grosor de tejido</b> Fabric thickness   Épaisseur de la toile	0,68 mm
<b>Clasificación resistencia al fuego</b> Fire classification   Résistance au feu	Ignífugo Clase 1 Fireproof Class 1   Ignifugé Classe 1
<b>Factor de apertura</b> Openness factor   Facteur d'ouverture	1% Aproximadamente Approximately   Approximativement
<b>Uso recomendado</b> Recommended use   Usage recommandé	Interior Interior   Intérieur
<b>Mantenimiento</b> Maintenance   Maintenance	Paño húmedo y jabón neutro por ambas caras Damp cloth and mild soap on both sides Chiffon humide et un savon doux sur les deux côtés
<b>Aplicaciones</b> Applications   Applications	
	Disponible   Available   Disponible 89, 127, 250 mm

saxun®